


# FM-102

## SURFACE MOUNT CONTACTS

1.32"Lx.53"Wx.3"H Side Lead Surface Mount Type

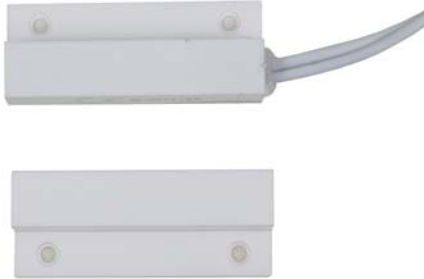

Contact Size: 1.32"Lx.53"Wx.3"H  
(33.6mmx13.5mmx7.5mm)

Standard Magnet Size: 1.32"Lx.53"Wx.3"H  
(33.6mmx13.5mmx7.5mm)

Standard Gap: .83"(21mm)

Colors: White, Brown, Gray, Tan

12"(305mm) 22 AWG Leads Standard  
Longer leads available.

### Specifications


Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
<b>FM-102</b>	.83"(21)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
<b>FM-103B</b>	.67"(17)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
<b>FM-104C</b>	.67"(17)	SPDT	SPDT	3	100	AC30/DC30	0.2

OPERATING TEMPERATURE:-40°C to +60°C

### Outline Dimensions

Unit: inch(mm)

#### FM-102/FM-103B

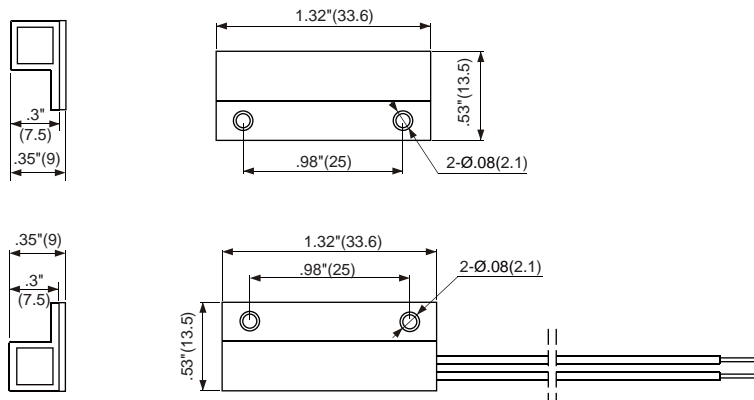

The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040


Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com


## Outline Dimensions

Unit: inch(mm)

### FM-104C

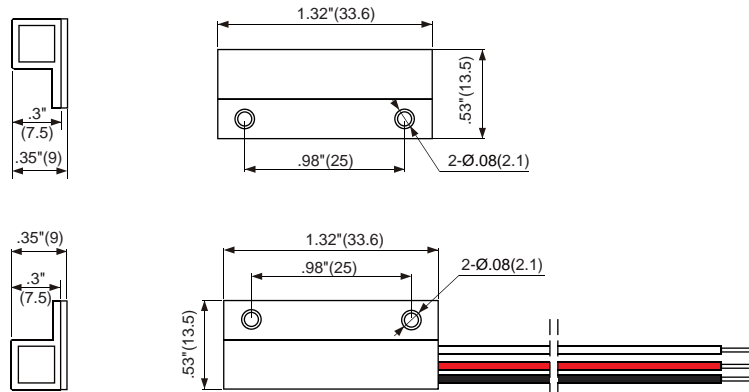

### FM-104C Wiring Diagram

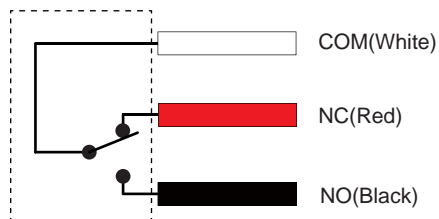

The Best Guarantee Since 1984 : \$50-1

## TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com