

# TANE MICRO

## SURFACE MOUNT CONTACTS

.67"L×.31"W×.16"H Surface Mount Type Ultra Mini Type W/Center Leads



Contact Size: .67"L×.31"W×.16"H  
(17mm×8mm×4mm)

Standard Magnet Size: .67"L×.31"W×.16"H  
(17mm×8mm×4mm)

Standard Gap: .32"(8mm)

Colors: White, Brown

12"(305mm) 22 AWG Leads Standard

Longer leads available

### Specifications


Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
TANE MICRO	.32"(8)	CLOSED	Normally Open	1	100	AC24/DC24	0.1

OPERATING TEMPERATURE:-40°C to +60°C

### Outline Dimensions

Unit: inch(mm)

### TANE MICRO

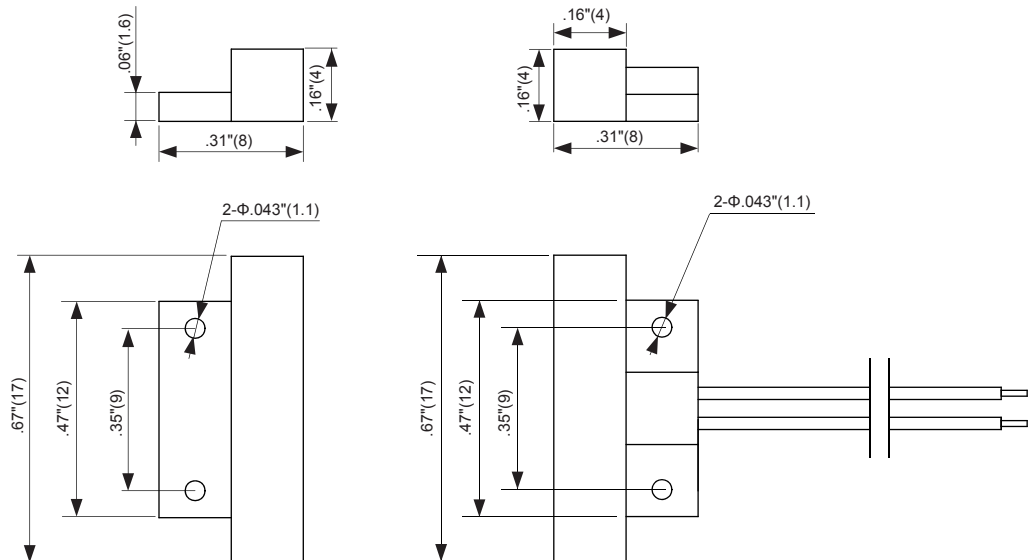

The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com